

Securing Cloud Native Workloads With **Istio**

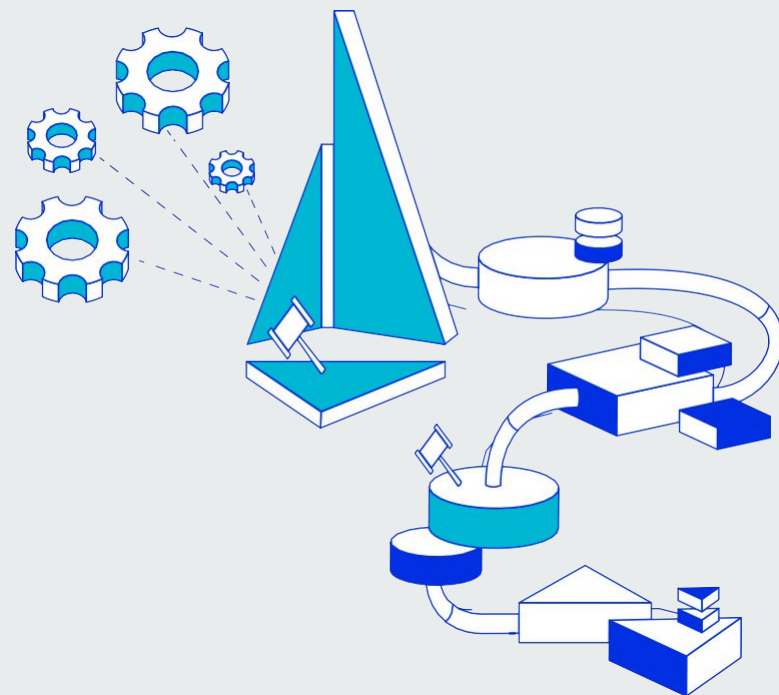

Gufran Mirza

 gufranmirza

Talk Outline

- **Introduction to Istio**
- **Service Identities**
- **Istio Authentication Policies**
- **Istio Authorization Policies**
- **Q & A**



Istio – Ιστίο

Open source service mesh



What is a service mesh

- Infrastructure/framework that handles communication between services
- Often implemented as network proxies deployed alongside the micro-services





Istio features

- **Secure service-to-service communication**
- **Access controls**
 - **Authorization / Authentication**
- Traffic control (routing rules, retries, timeouts, fault injection, mirroring)
- Metrics and traces for traffic


Important Terminology

- **Workload** - anything owning/controlling pods (like a Deployment) or the pods themselves
- **Service** - a microservice / application


Before Istio

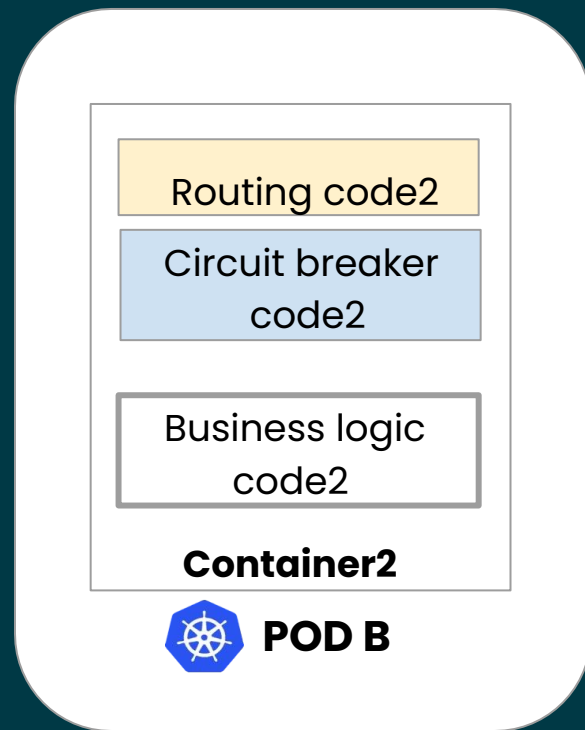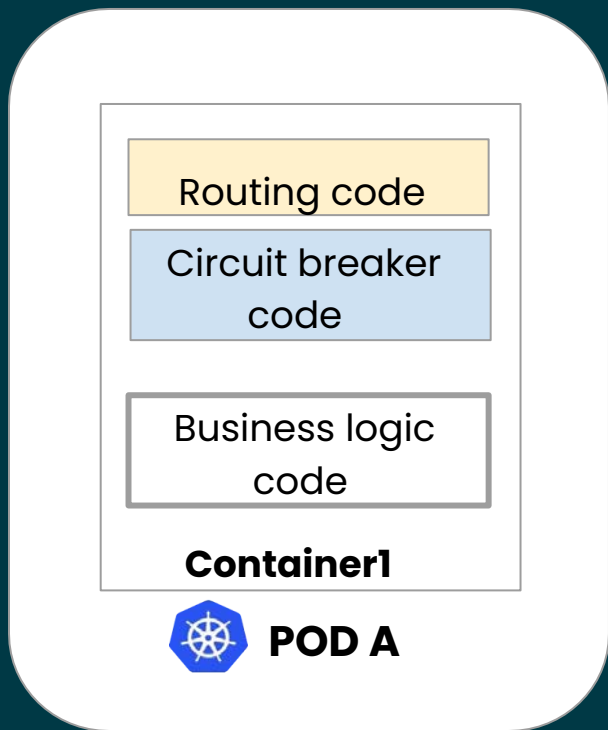

Pod with Sidecar

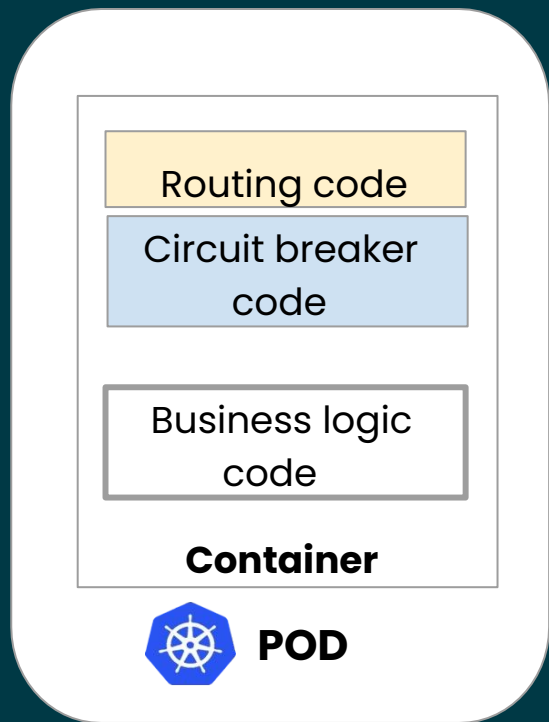

No sidecar

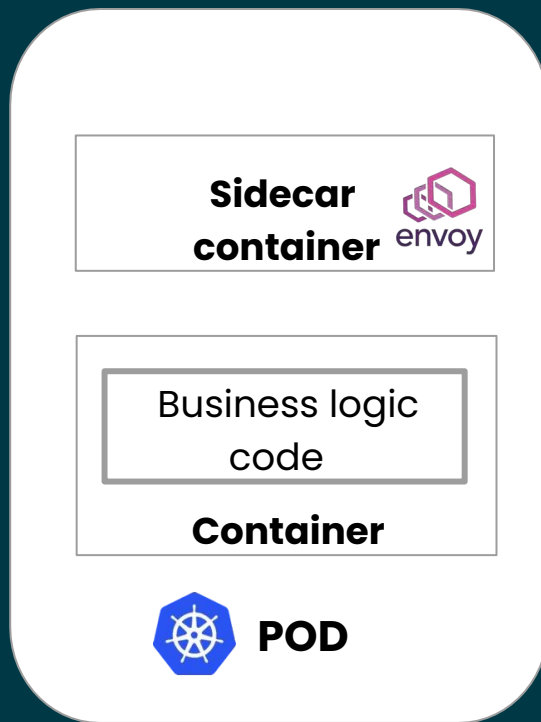

With sidecar

Sidecar Proxy


- A proxy is deployed in a container next to each instance of micro-service (inside a pod)
- Container name: istio-proxy
- It is **transparent** to application code
- Envoy open source proxy is currently used



How is the sidecar injected?


- Manually
- Automatically injected to pod on creation
 - `kubectl label namespace default istio-injection=enabled`

With Istio – sidecar intercepts all traffic

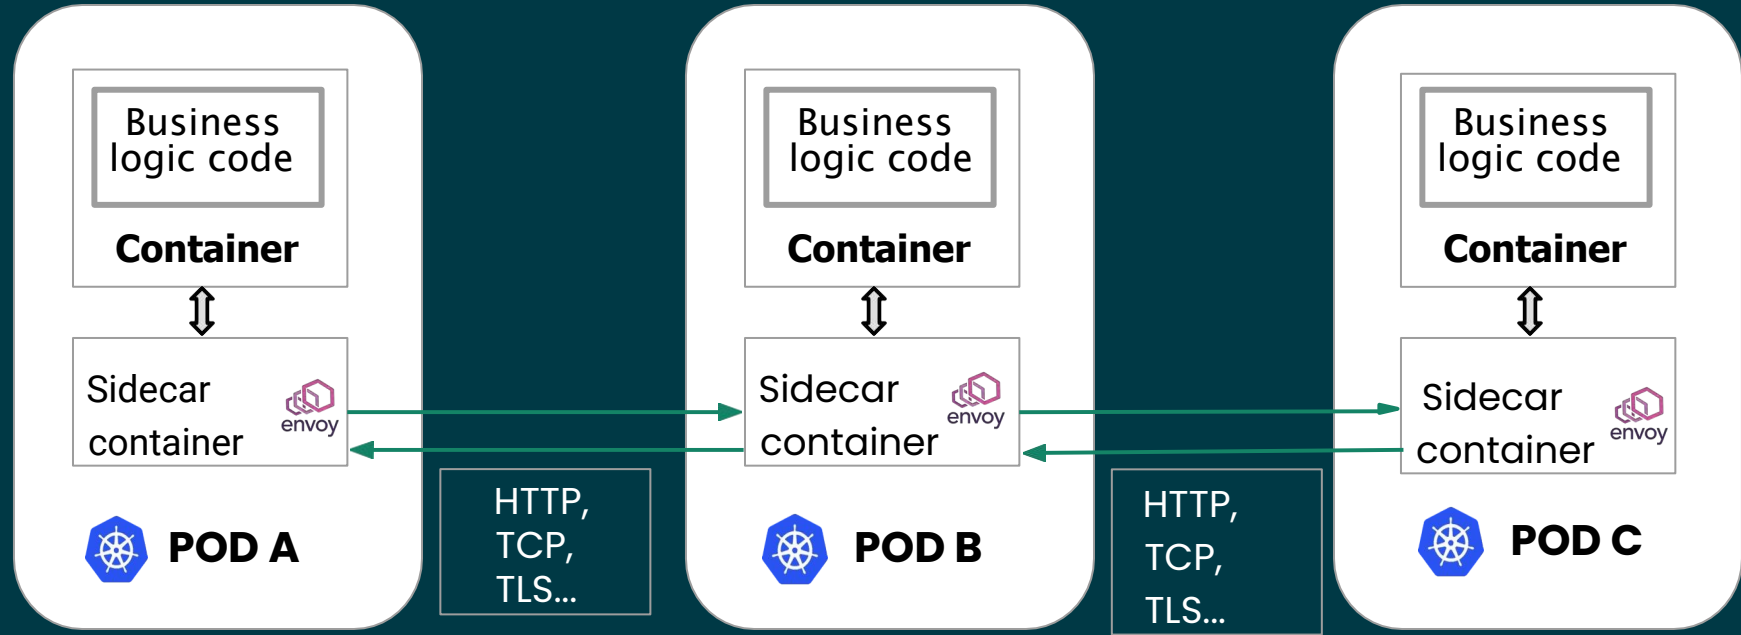

Configuration is transparent to the services and not part of the code

Istio architecture

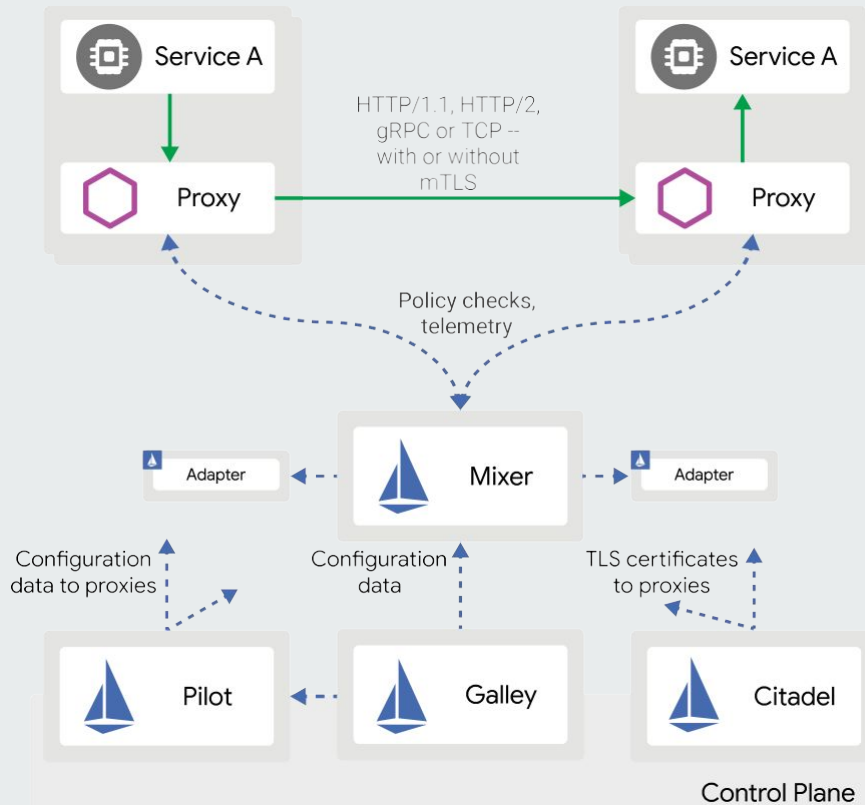

Service Mesh Security

Authorization & Authentication



Service Identities – The starting point


In a service mesh world, establishing the identity of the workload providing a service is critical. Examples:

- **Kubernetes:** Kubernetes service account
- **GCP:** GCP service account
- **AWS:** AWS IAM user/role account
- **On-premises (non-Kubernetes):** user account, custom service account

Conversion of identity into a certificate

- A private key within the workload pod is generated and Made available to the proxy.
- A certificate signing request is sent to the control plane.
- The control plane provides the proxy a certificate scoped to the identity of the POD (e.g. K8s service-account).
- Control plane will manage rotation.

Identity Provisioning Workflow

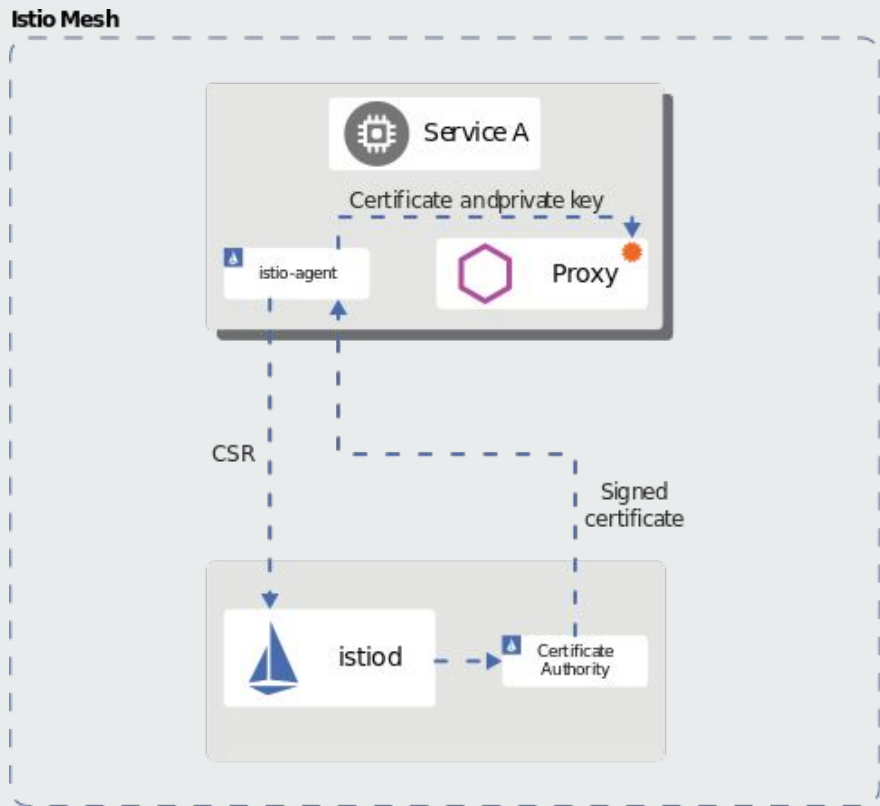


Authentication

Istio provides two types of authentication

- End user authentication (JSON Web Token (JWT))
- Service to service authentication (mutual TLS)
 - PERMISSIVE: Workloads accept both mutual TLS and plain text traffic
 - STRICT: Workloads only accept mutual TLS traffic.
 - DISABLE: Mutual TLS is disabled

Authentication Flow

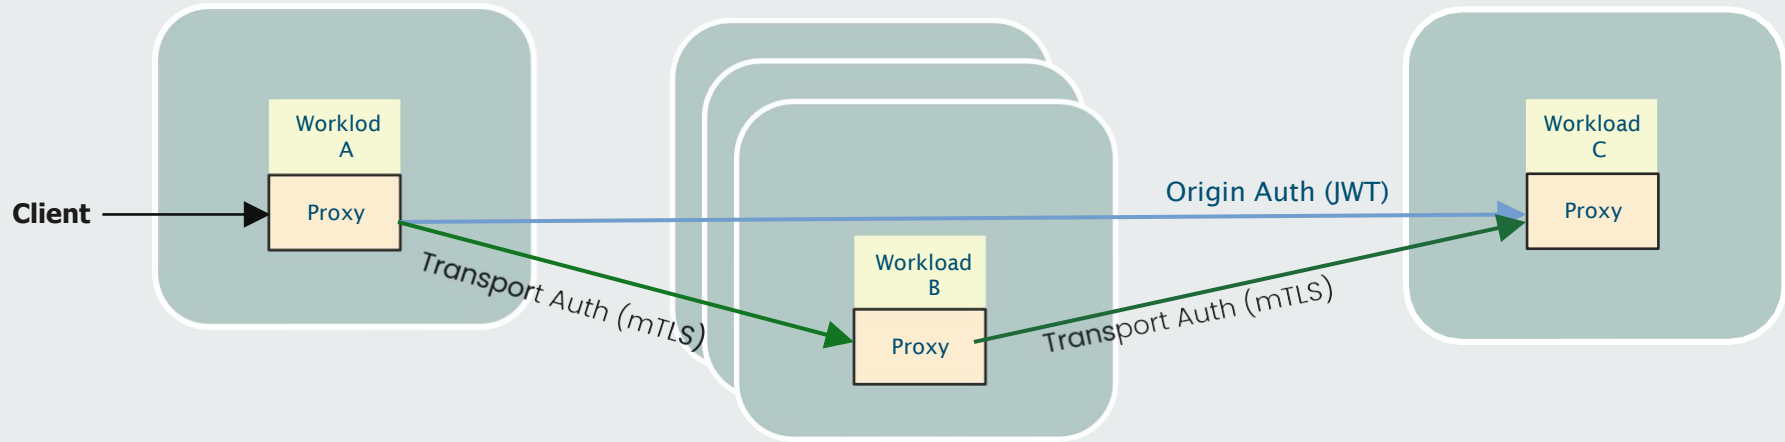

You can specify authentication requirements for workloads receiving requests in an Istio mesh using peer and request authentication policies

Peer authentication

The following peer authentication policy requires all workloads in namespace foo to use mutual TLS:

```
apiVersion: security.istio.io/v1beta1
kind: PeerAuthentication
metadata:
  name: "example-policy"
  namespace: "foo"
spec:
  mtls:
    mode: STRICT # Workloads only accept mutual TLS traffic
```

Authentication Demo

A picture is worth a thousand yamls



Ingress Gateway

An ingress Gateway describes a load balancer operating at the edge of the mesh

- Receives incoming HTTP/TCP connections
- Ingress Gateway is a customizable proxy that can route inbound traffic to backend hosts
- Ingress Gateway handles all TLS operations (handshake, certs/keys exchange)

Ingress Gateway

TLS modes enforced by the proxy

- PASSTHROUGH
- SIMPLE
- MUTUAL
- etc.

Configuration YAML



```
apiVersion: networking.istio.io/v1alpha3
kind: Gateway
metadata:
  name: mygateway
spec:
  selector:
    istio: ingressgateway # use istio default ingress gateway
  servers:
    - port:
        number: 443
        name: https
        protocol: HTTPS
      tls:
        mode: SIMPLE
        credentialName: httpbin-credential # must be the same as secret
      hosts:
        - httpbin.example.com
```

Authentication Demo

A picture is worth a thousand yamls




Authorization

Istio's authorization features provide mesh-, namespace-, and workload-wide access control for your workloads in the mesh

- Can service <A> send <this request> to service ?
- Authorization policies support ALLOW, DENY and CUSTOM actions
- Istio authorization (ALLOW and DENY) is enforced natively on Envoy
- It is a good security practice to start with the allow-nothing policy and incrementally add more ALLOW policies to open more access to the workload.

Authorization Flow

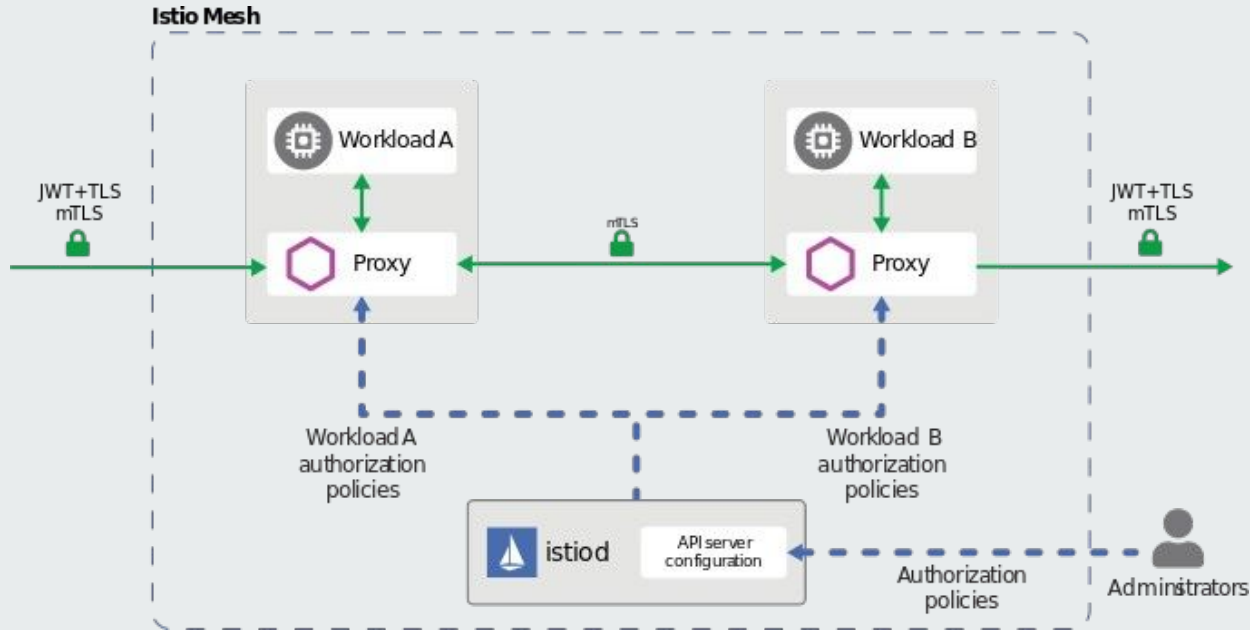

Each Envoy proxy runs an authorization engine that authorizes requests at runtime. Authorization engine evaluates the request context and returns the authorization result, either ALLOW or DENY

Authorization Policy

```
apiVersion: security.istio.io/v1beta1
kind: AuthorizationPolicy
metadata:
  name: httpbin
  namespace: foo
spec:
  selector:
    matchLabels:
      app: httpbin
      version: v1
  action: ALLOW
  rules:
  - from:
    - source:
        principals: ["cluster.local/ns/default/sa/sleep"]
    to:
    - operation:
        methods: ["GET"]
```

authorization policy that allows the cluster.local/ns/default/sa/sleep service account to access the workloads with the app: httpbin

Authorization Demo

A picture is worth a thousand yamls



Q & A



Connect with the community

[Istio.io](https://istio.io)

 IstioMesh

github.com/istio

Thank You

